

SCHMUTZFÄNGER SF388w, SF388d



TECHNISCHE DATEN

Gehäuse: Messing CW617N vernickelt

Anschluss: Gewinde ISO228


Betriebstemp.: max. 100°C

Lieferbar von 3/8" – 4", PN16

Maschenweite SF388w 800my, SF388d 300my

SF388w für Wasser

SF388d für Dieselöl

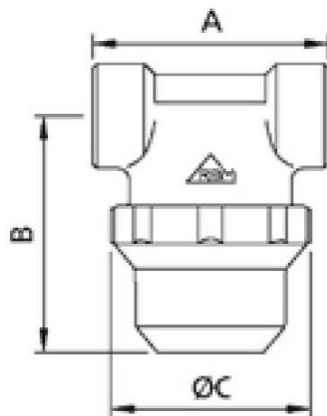

Size	A mm	B mm	ØC mm
G3/8"	50	50	42,5
G1/2"	56	53	42,5
G3/4"	67	51,5	48
G1"	80	55,5	58,5
G1"1/4	92	68,5	78,5
G1"1/2	109	94	80,5
G2"	109	94	80,5
G2"1/2	180	192,5	186
G3"	188	192,5	186
G4"	202	192,5	186

SF388w

Size Taille Размер Dimensiune Medida Abmessung	Kvs (m ³ /h)
3/8"	2,60
1/2"	3,40
3/4"	5,00
1"	8,70
1"1/4	14,10
1"1/2	26,50
2"	26,50
2"1/2	104,70
3"	108,20
4"	111,80

SF388d

Size Taille Размер Dimensiune Medida Abmessung	Kvs (m ³ /h)
3/8"	2,00
1/2"	3,30
3/4"	4,90
1"	8,40
1"1/4	13,70
1"1/2	24,40
2"	24,40
2"1/2	100,10
3"	101,70
4"	108,00