


HAUSWASSERFILTER SF389



TECHNISCHE DATEN

Gehäuse: Messing vernickelt
Anschluss: Gewinde ISO228
Betriebstemp.: max. +110°C
Lieferbar von 3/8" – 4"
Maschenweite: 100µm
Betriebsdruck: PN16

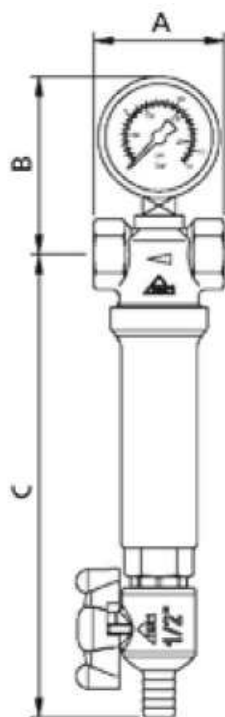

Size Taille Размер Dimensione Medida Abmessung	Kvs (m ³ /h) Kvs (m ³ /h) Kvs (m ³ /h) Kvs (m ³ /h) Kvs (m ³ /h)
3/8"	1,8
1/2"	3,10
3/4"	5,80
1"	8,55
1"1/4	14,85
1"1/2	24,40
2"	26,10
2"1/2	107,80
3"	120,20
4"	129,00

Size	A mm	B mm	C mm
G3/8"	50	74	195,5
G1/2"	56	76	199
G3/4"	67	78	192
G1"	80	82	198
G1"1/4	92	86,5	229
G1"1/2	109	89,5	239
G2"	109	96	239
G2"1/2	180	124	466
G3"	188	124	466
G4"	202	124	466
G1"	80	82	198
G1"1/4	92	86,5	229
G1"1/2	109	89,5	239
G2"	109	96	239