

klepp *Edelstahlkugelhahn KHN7214HS*



TECHNISCHE DATEN

Flansch [Flanged] PN16

Mat.: 1.4408 / PTFE

Druck [Pressure]: PN16

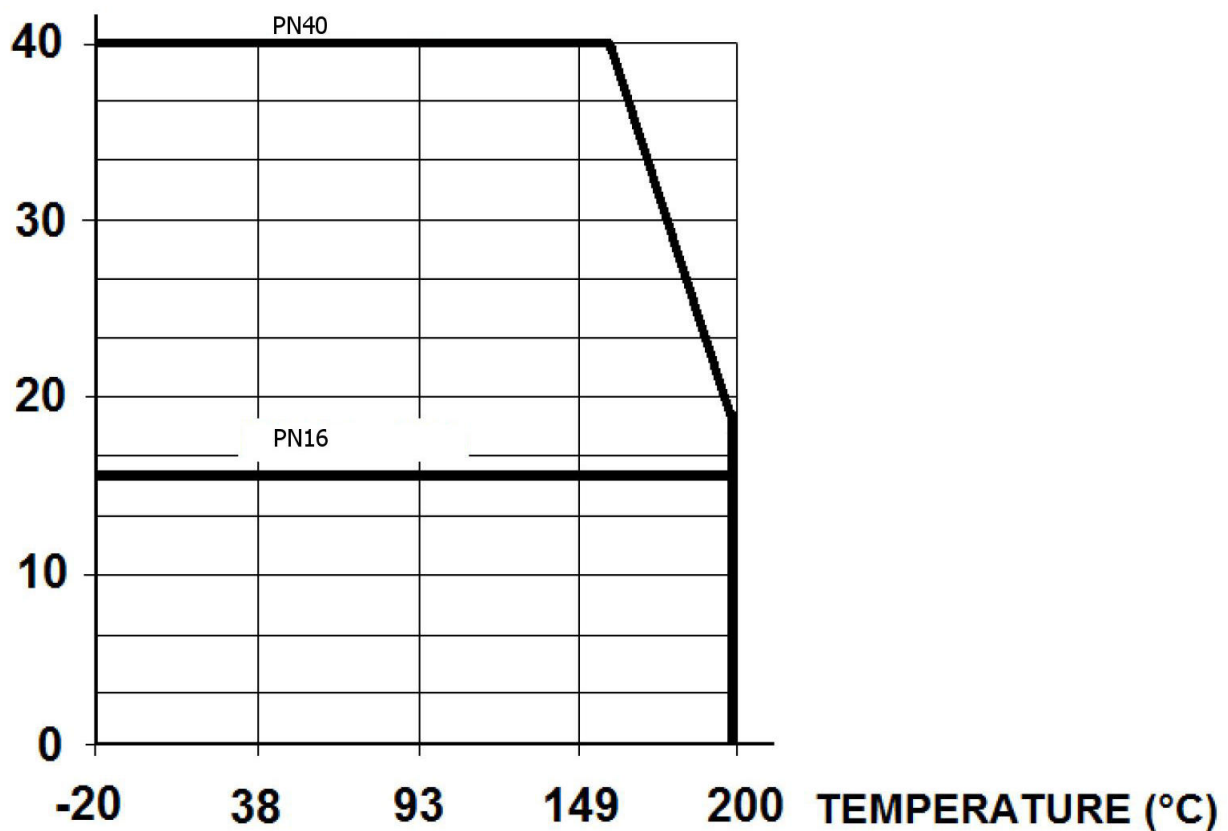
Temp.: -20°C - +200°C

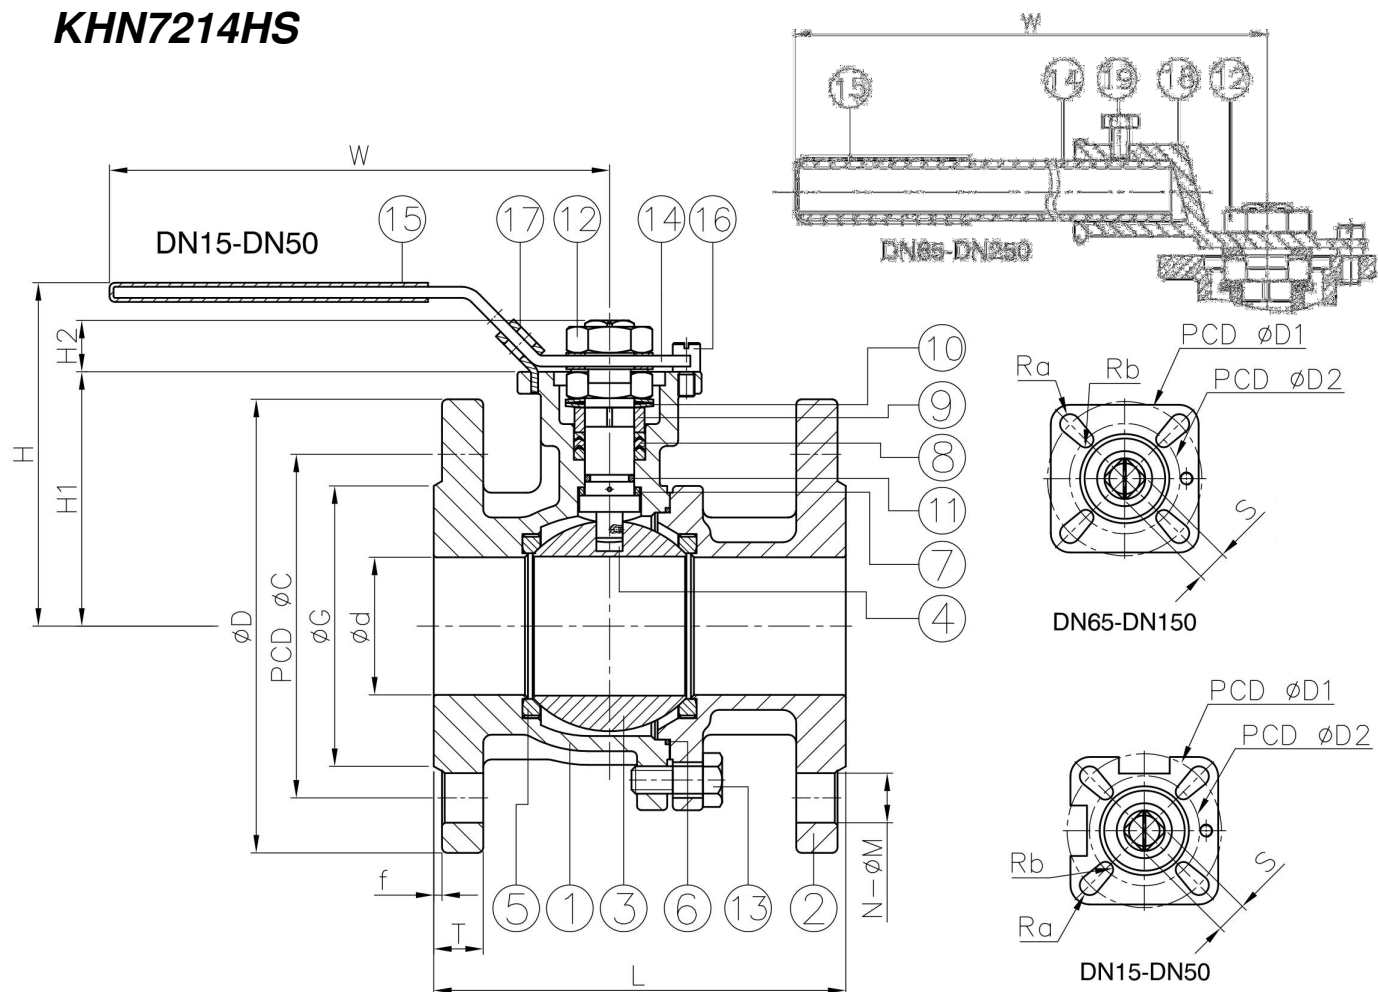
ISO5211 mounting pad

Standard: Handhebel absperbar [hand lever]

Lieferbar [Available]: DN15 – DN100

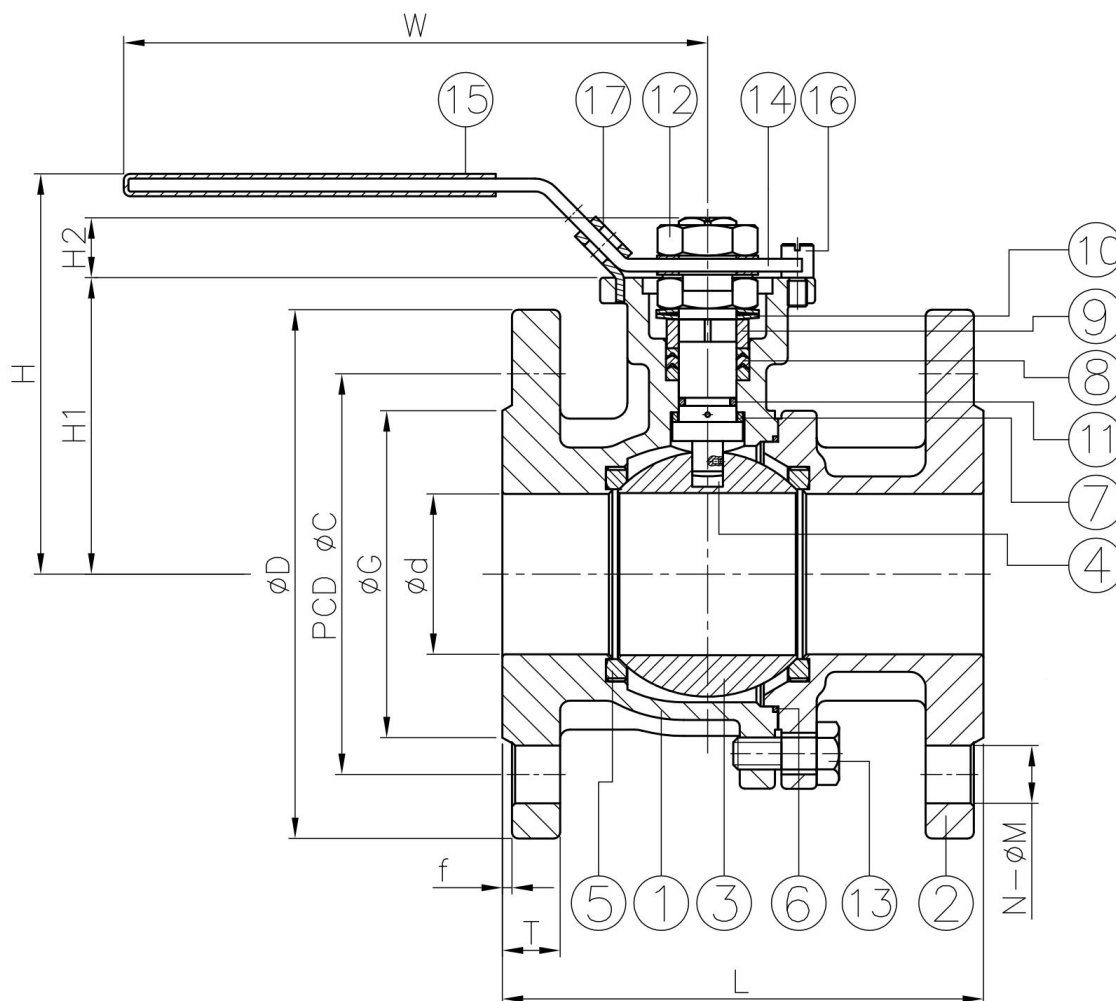
Druck [Pressure] [bar]



KHN7214HS

DN	d	G		C		D		L	H	H1	H2	W	T		f
		PN16	PN40	PN16	PN40	PN16	PN40						PN16	PN40	
15	15	45	45	65	65	95	95	115	84.5	55	9	83.5	14	16	2
20	20	58	58	75	75	105	105	120	92.5	66.5	11	83.5	16	18	2
25	25	68	68	85	85	115	115	125	102.1	66.5	11	104.5	16	18	2
32	32	78	78	100	100	140	140	130	108.1	74	11	104.5	16	18	2
40	38	88	88	110	110	150	150	140	121.4	85.5	15	130	16	18	3
50	50	102	102	125	125	165	165	150	128.4	92.5	15	130	18	20	3
65	63	122	122	145	145	185	185	170	155.6	113	18	344	18	22	3
80	76	138	138	160	160	200	200	180	167	124.5	18	344	20	24	3
100	96	158	162	180	190	220	235	190	186	142.5	23	392	20	24	3

DN	S	D1	D2	Ra	Rb	N		M		ISO-5211	Torque (N-M)		Weight (kg)	
						PN16	PN40	PN16	PN40		Breakaway	Action	PN16	PN40
15	9	42	36	2.75	2.75	4	4	14	14	F03-F04	7.5	5	2.3	2.5
20	9	42	36	2.75	2.75	4	4	14	14	F03-F04	7.4	5	3	3.3
25	11	50	42	3.5	2.75	4	4	14	14	F04-F05	17.2	14.9	3.4	3.7
32	11	50	42	3.5	2.75	4	4	18	18	F04-F05	19.6	16.6	4.9	5.3
40	14	70	50	4.5	3.5	4	4	18	18	F05-F07	22.6	20.4	7.3	7.8
50	14	70	50	4.5	3.5	4	4	18	18	F05-F07	31.7	26.3	9.1	9.7
65	17	102	70	5.5	4.5	4	8	18	18	F07-F10	40.2	33.8	12.6	13.7
80	17	102	70	5.5	4.5	8	8	18	18	F07-F10	85.3	73.1	16.1	17.6
100	22	125	102	6.5	5.5	8	8	18	22	F10-F12	95.7	73.3	22.8	26.1

KHN7214HS

ITEM	PARTS	MATERIAL	
1	BODY	1.4408	
2	CAP		
3	BALL	ASTM A351-CF8M	
4	STEM	ASTM A276-316	
5	SEAT	RTFE	
6	GASKET	PTFE	
7	THRUST WASHER		
8	PACKING		
9	GLAND RING	AISI 304	
10	BELLEVILLE WASHER	AISI 301	
11	O-RING	VITON	
12	STEM NUT	AISI 304	
13	BOLT		
14	HANDLE	STAINLESS STEEL	
15	HANDLE SLEEVE	PVC	
16	STOP PIN	AISI 304	
17	LOCKING DEVICE	STAINLESS STEEL	
18	HANDLE HEAD	AISI 304	
19	HANDLE BOLT		