


klepp *Edelstahlkugelhahn KHN7314HS*




TECHNISCHE DATEN

Flansch [Flange] EN1092-1 PN40
Baulänge [face to face] DIN3202-F1
Mat.: 1.4408 / PTFE
Druck [Pressure]: PN40
Temp.: -20°C - +200°C
Lieferbar [Available]: DN15 – DN100
ISO 5211 mounting pad


Druck [Pressure] [bar]

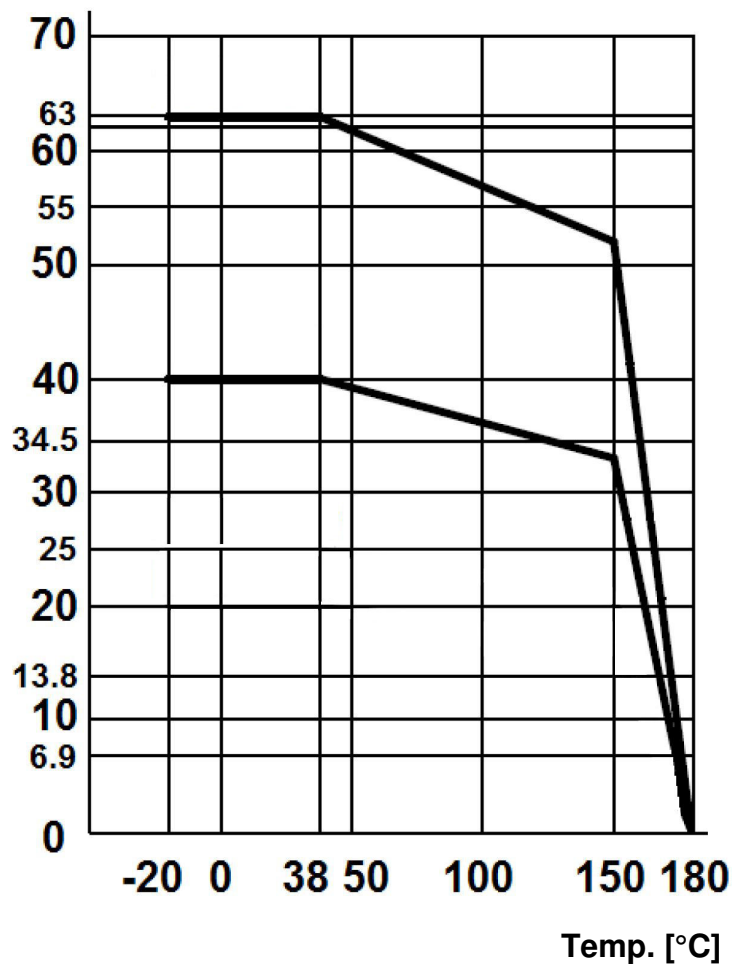

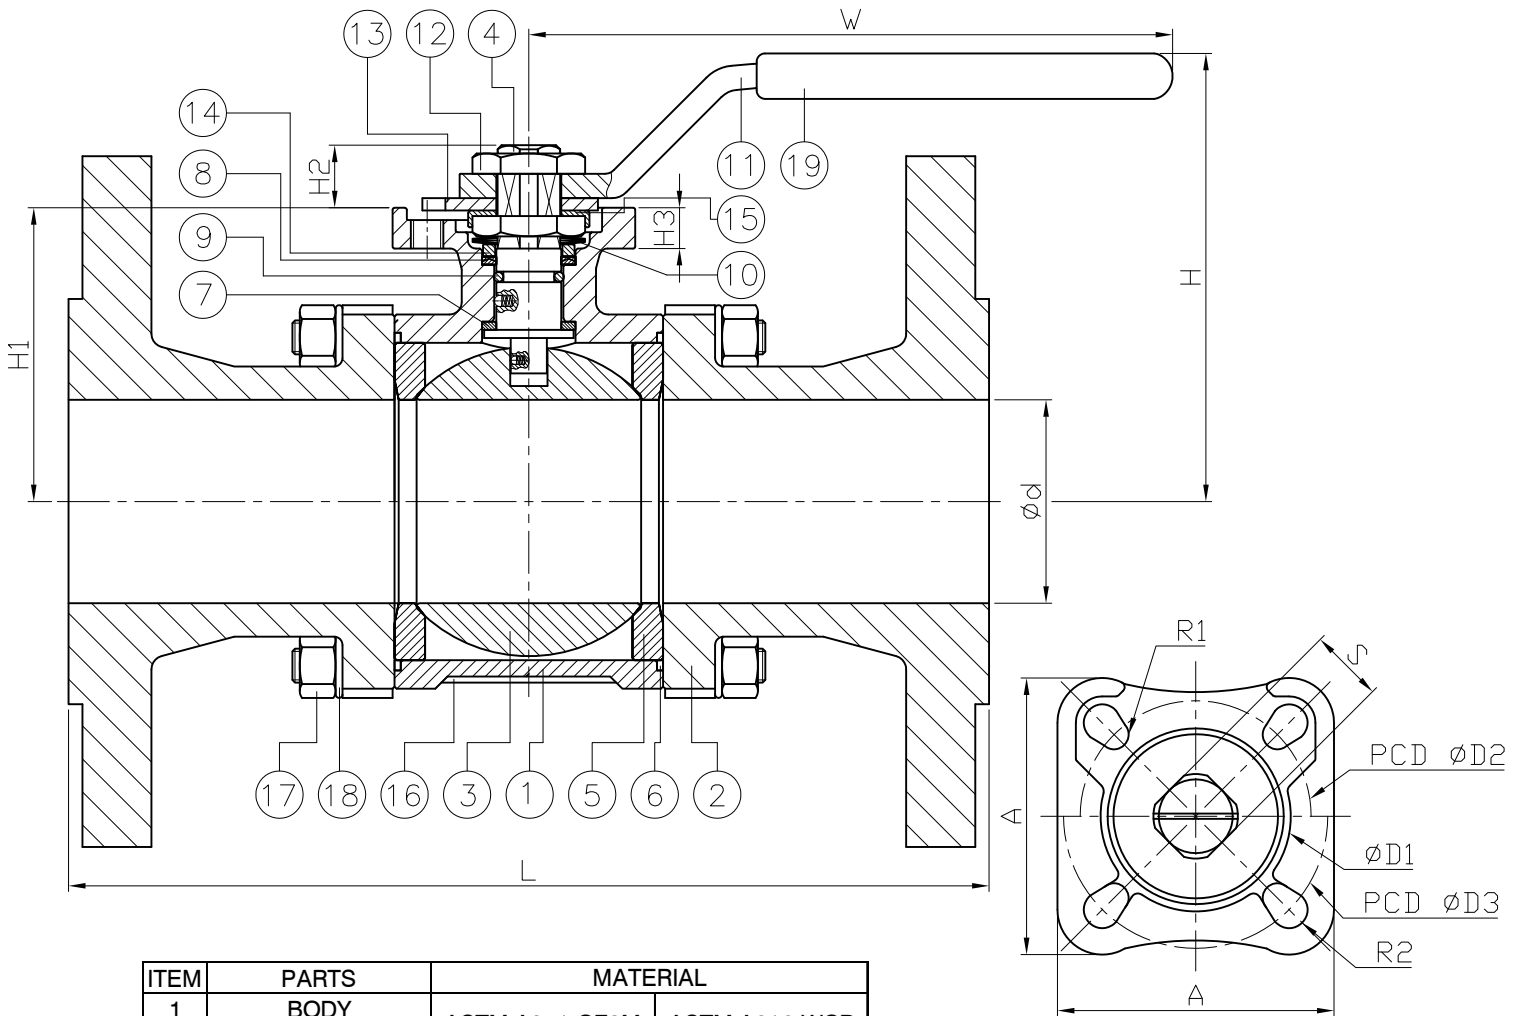


ITEM	PARTS	MATERIAL	
1	BODY	ASTM A351-CF8M	ASTM A216-WCB
2	CAP		
3	BALL	ASTM A351-CF8M	
4	STEM	ASTM A276-316	
5	SEAT	PTFE / RTFE / CTFE	
6	SEAL		
7	THRUST WASHER	PTFE	
8	PACKING		
9	O-RING	VITON	
10	DISC SPRING	AISI 301	
11	HANDLE	STAINLESS STEEL	
12	STEM NUT		
13	STOPPER		
14	GLAND RING		
15	LOCKING DEVICE	AISI 304	
16	BOLT		
17	NUT		
18	SPRING WASHER		
19	HANDLE SLEEVE	PVC	

DN	d	L	H	H1	H2	H3	W	S	A	D1	D2	D3	R1	R2	ISO 5211	Torque(N-m)
15	15	130	76	39.5	7.5	6.5	147	9	42	31	36	42	2.75	2.75	F03/04	4
20	20	150	83.5	44.5	9	6.5	147	9	42	31	36	42	2.75	2.75	F03/04	7
25	25	160	96.7	48	9.5	8	160	11	52	35.5	42	50	2.75	3.5	F04/05	8
32	32	180	101.7	53	12	8	160	11	52	35.5	42	50	2.75	3.5	F04/05	11
40	38	200	112	65	13	9	178	14	70	56	50	70	3.5	4.5	F05/07	17

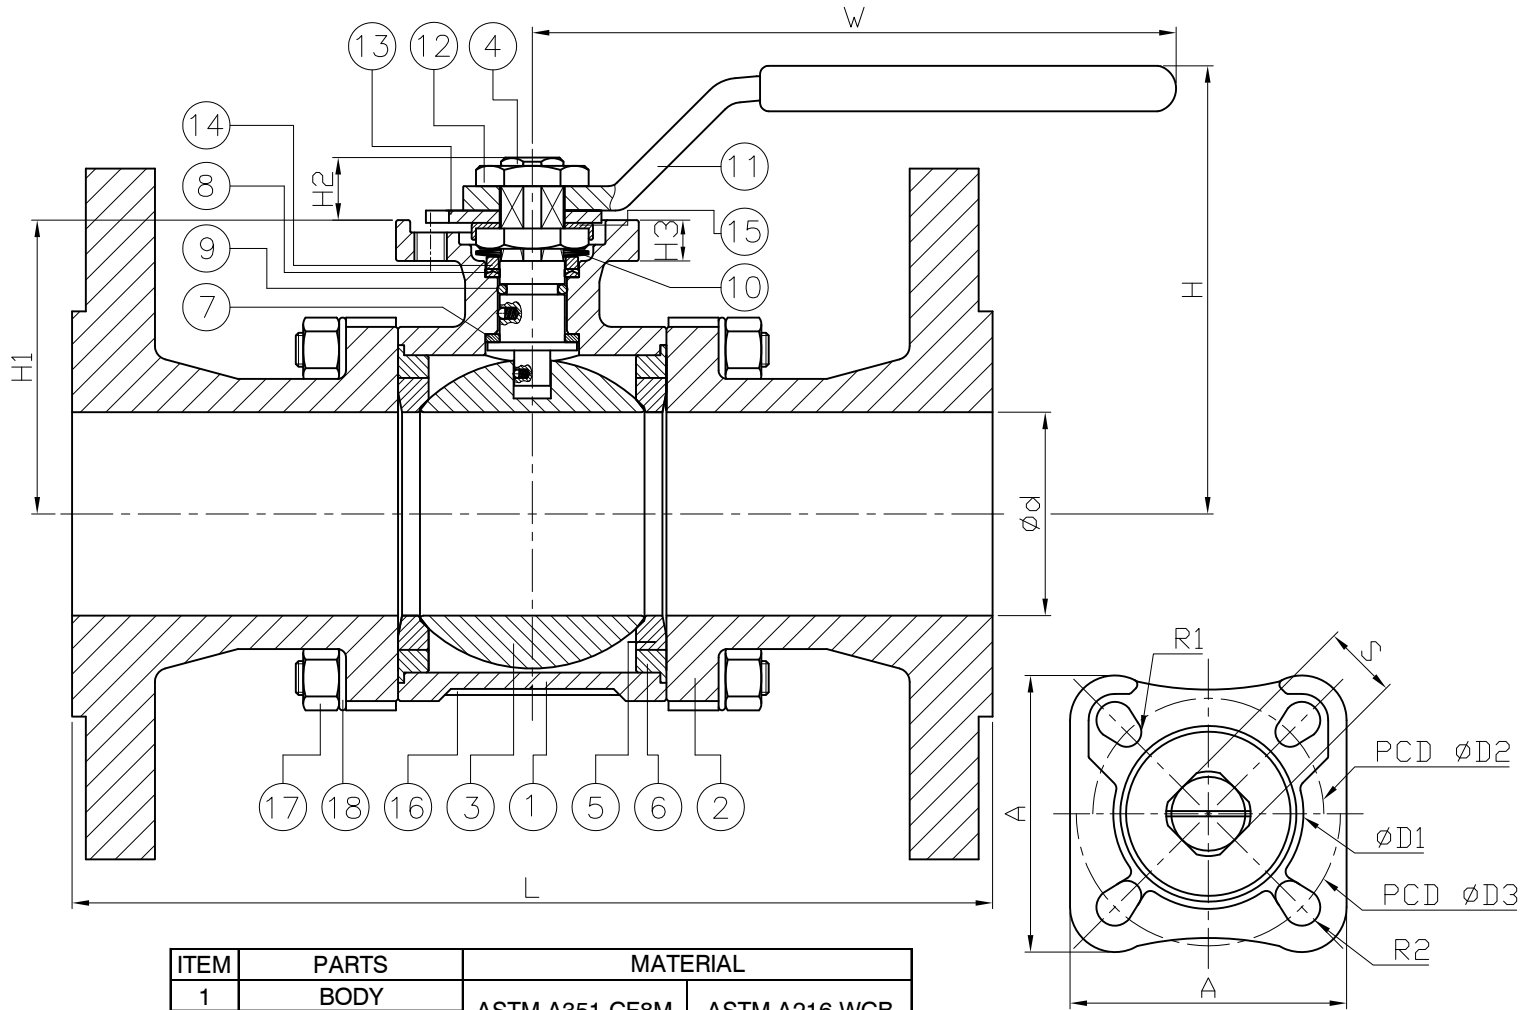

ITEM	PARTS	MATERIAL	
1	BODY	ASTM A351-CF8M	ASTM A216-WCB
2	CAP		
3	BALL	ASTM A351-CF8M	
4	STEM	ASTM A276-316	
5	SEAT	PTFE / RTFE / CTFE	
6	SEAL	PTFE	
7	THRUST WASHER		
8	PACKING	VITON	
9	O-RING		
10	DISC SPRING	AISI 301	
11	HANDLE	STAINLESS STEEL	
12	STEM NUT	AISI 304	
13	STOPPER		
14	GLAND RING		
15	LOCKING DEVICE		
16	BOLT		
17	NUT		
18	SPRING WASHER		

DN	d	L	H	H1	H2	H3	W	S	A	D1	D2	D3	R1	R2	ISO 5211	Torque(N-M)
50	50	230	121	73	13	9	178	14	70	56	50	70	3.5	4.5	F05 / F07	45

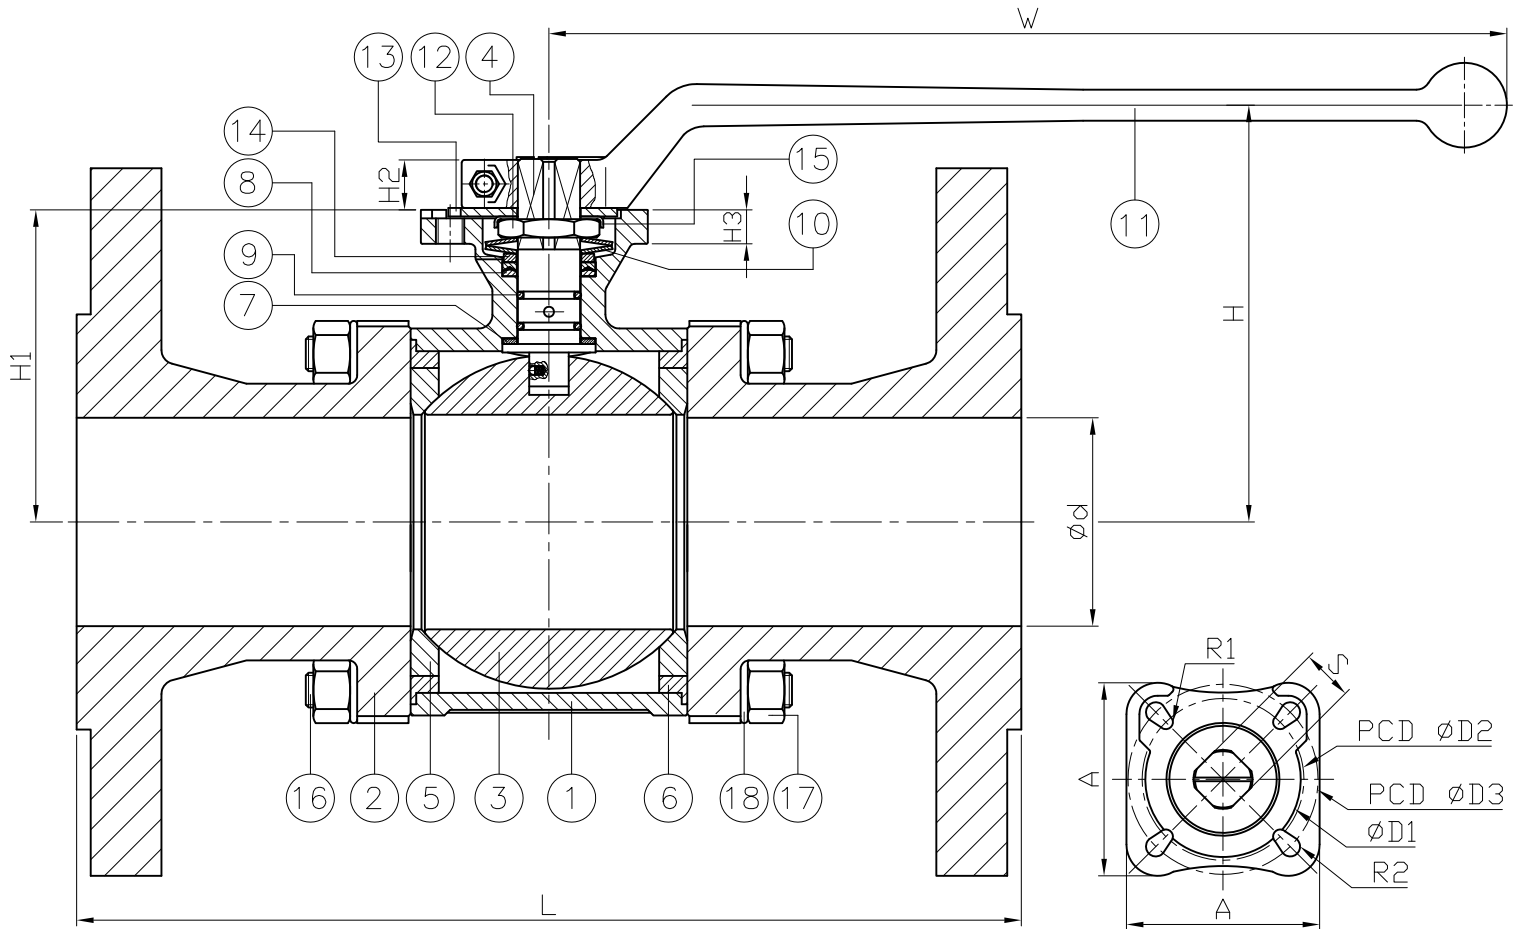

ITEM	PARTS	MATERIAL	
1	BODY	ASTM A351-CF8M	ASTM A216-WCB
2	CAP		
3	BALL	ASTM A351-CF8M	
4	STEM	ASTM A276-316	
5	SEAT	PTFE / RTFE / CTFE	
6	SEAL		
7	THRUST WASHER	PTFE	
8	PACKING		
9	O-RING	VITON	
10	DISC SPRING	AISI 301	
11	HANDLE		
12	STEM NUT		
13	STOPPER		
14	GLAND RING	AISI 304	
15	LOCKING DEVICE		
16	BOLT		
17	NUT		
18	SPRING WASHER		
19	HANDLE SLEEVE	PVC	

DN	d	L	H	H1	H2	H3	W	S	A	D1	D2	D3	R1	R2	ISO 5211	Torque(N-M)
65	65	290	143	104.5	15.5	11	325	17	100	76	70	102	4.5	5.5	F07 / 10	59
80	80	310	151	112.5	18.5	11	325	17	100	76	70	102	4.5	5.5	F07 / 10	90
100	100	350	175	136	23.5	13	325	22	125	100	102	125	5.5	6.5	F10 / 12	160