



Screwed End Y-Globe Valve SSN 8115

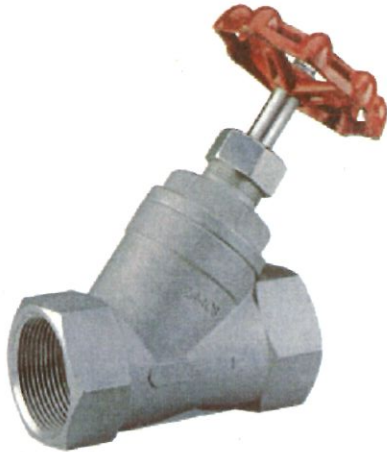

Features:

- The thread ends conform to ASME B1.20.1 (NPT) DIN 2999 & BS 21 ISO 228/1 & ISO 7/1
- Investment casting
- Rising stem
- Pressure Rating PN 16 / 40
- Max working temperature 445°F

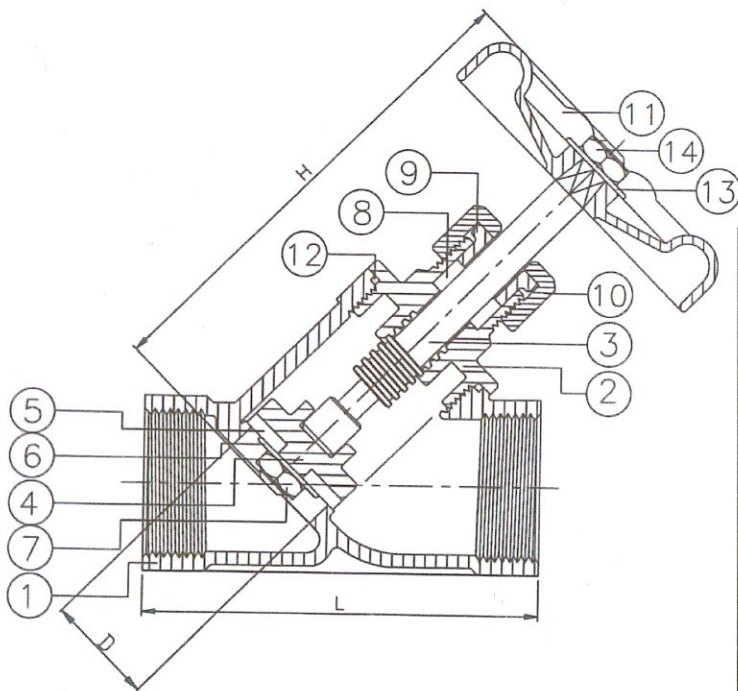

Applicable Standard	
Test and Inspection	API 598

ITEM	PARTS	MATERIAL
1	Body	ASTM A351 – CF8M / 1.4408
2	Bonnet	ASTM A351 – CF8M / 1.4408
3	Stem	AISI 316
4	Disc	AISI 316
5	Seat	PTFE
6	Washer	AISI 316
7	Nut	AISI 316
8	Stem Packing	PTFE
9	Gland	AISI 304
10	Packing Nut	AISI 304
11	Handwheel	Mico Steel
12	Joint Gasket	PTFE
13	Washer	AISI 304
14	Nut	AISI 304

DN	L	H	D
8	65	107	11
10	65	107	13
15	65	107	15
20	80	122	20
25	90	142	25
32	105	155	32
40	120	175	38
50	140	195	50

unit: mm