

## SCHNELLSCHLUSSSCHIEBER SC163



### TECHNISCHE DATEN


Gehäuse: Messing CW614N

Spindeldichtung: EPDM

Gewinde: ISO228/1

Betriebstemp.: 0°C – 80°C ohne Dampf

Lieferbar von 3/8" – 4"

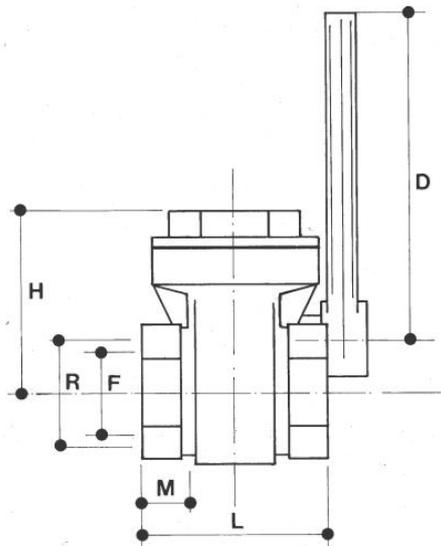

R"	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
L	-	44	46	51	57	61	67	77	86	91	102
H	-	40	40	48	55	62	68	81	108	121	148
D	-	80	80	100	100	120	137	165	205	205	205
F	-	15	15	20	25	32	37	47	58	72	92
M	-	9	10	10	12	14	15	16	16	18	20

### MAX. DRUCK

R"	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
PN 25											
PN 20											
PN 16											
PN 10											
PN 6											